


IMPORTANT: Remember to read the Nissan instructions before starting. I read the Nissan and EZ ON instructions numerous times before starting.


DAMN THAT TEAR!!!!




Step 1: Remove the plastic cover and then unscrew all screws that hold the top fabric.

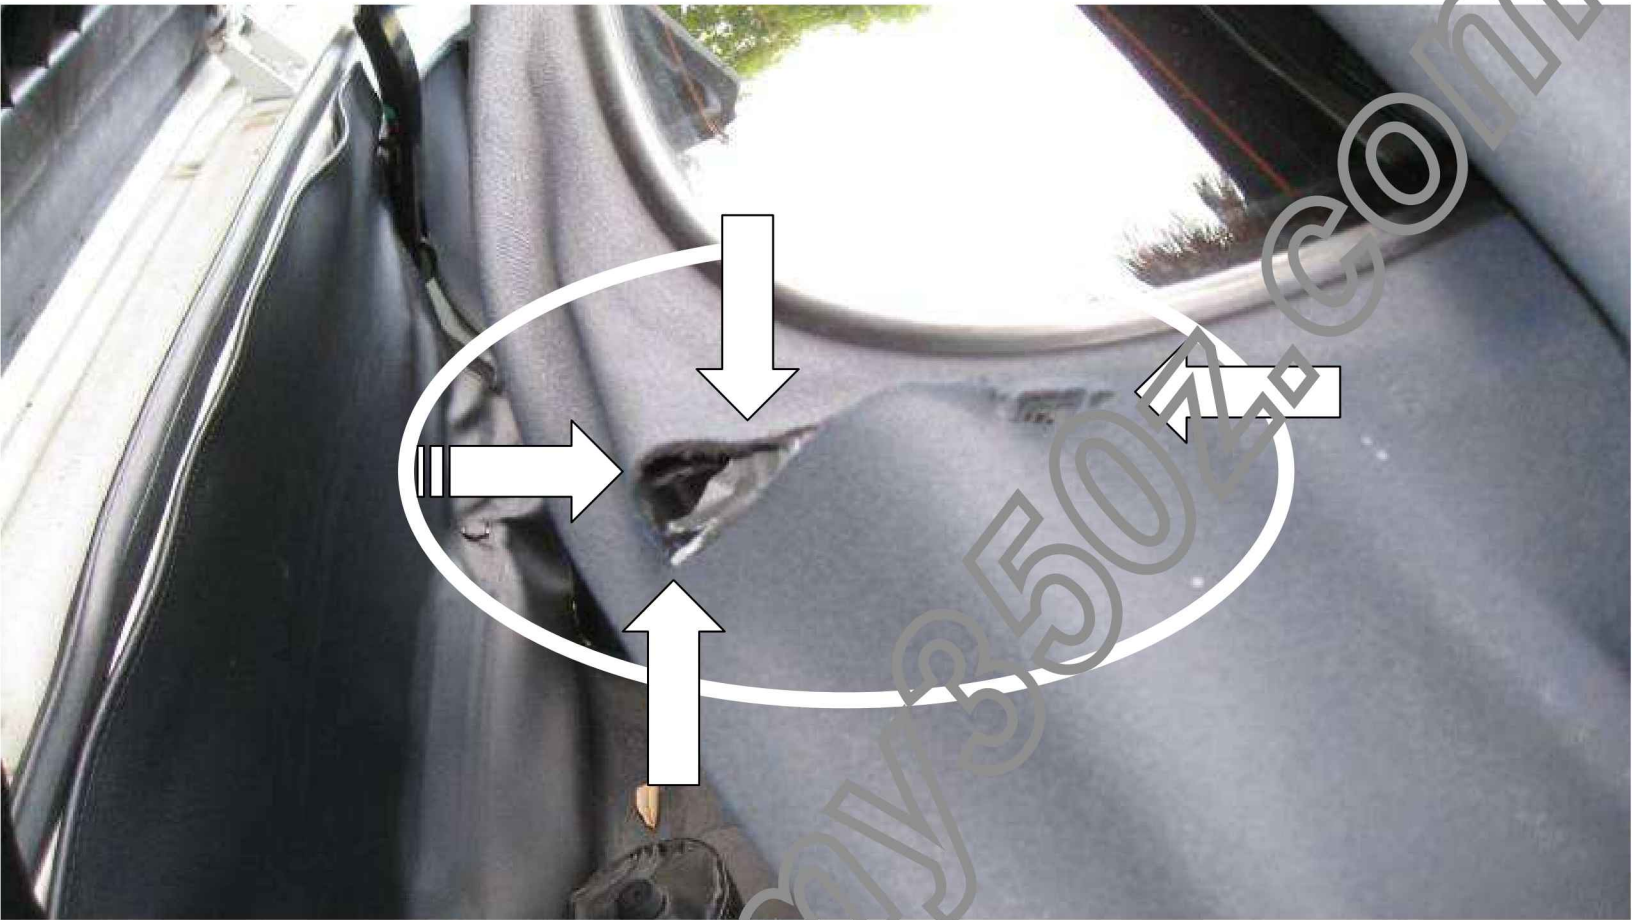

Step 2: Pull off the rubber seal & unscrew the metal bracket and mark it as D for driver side.

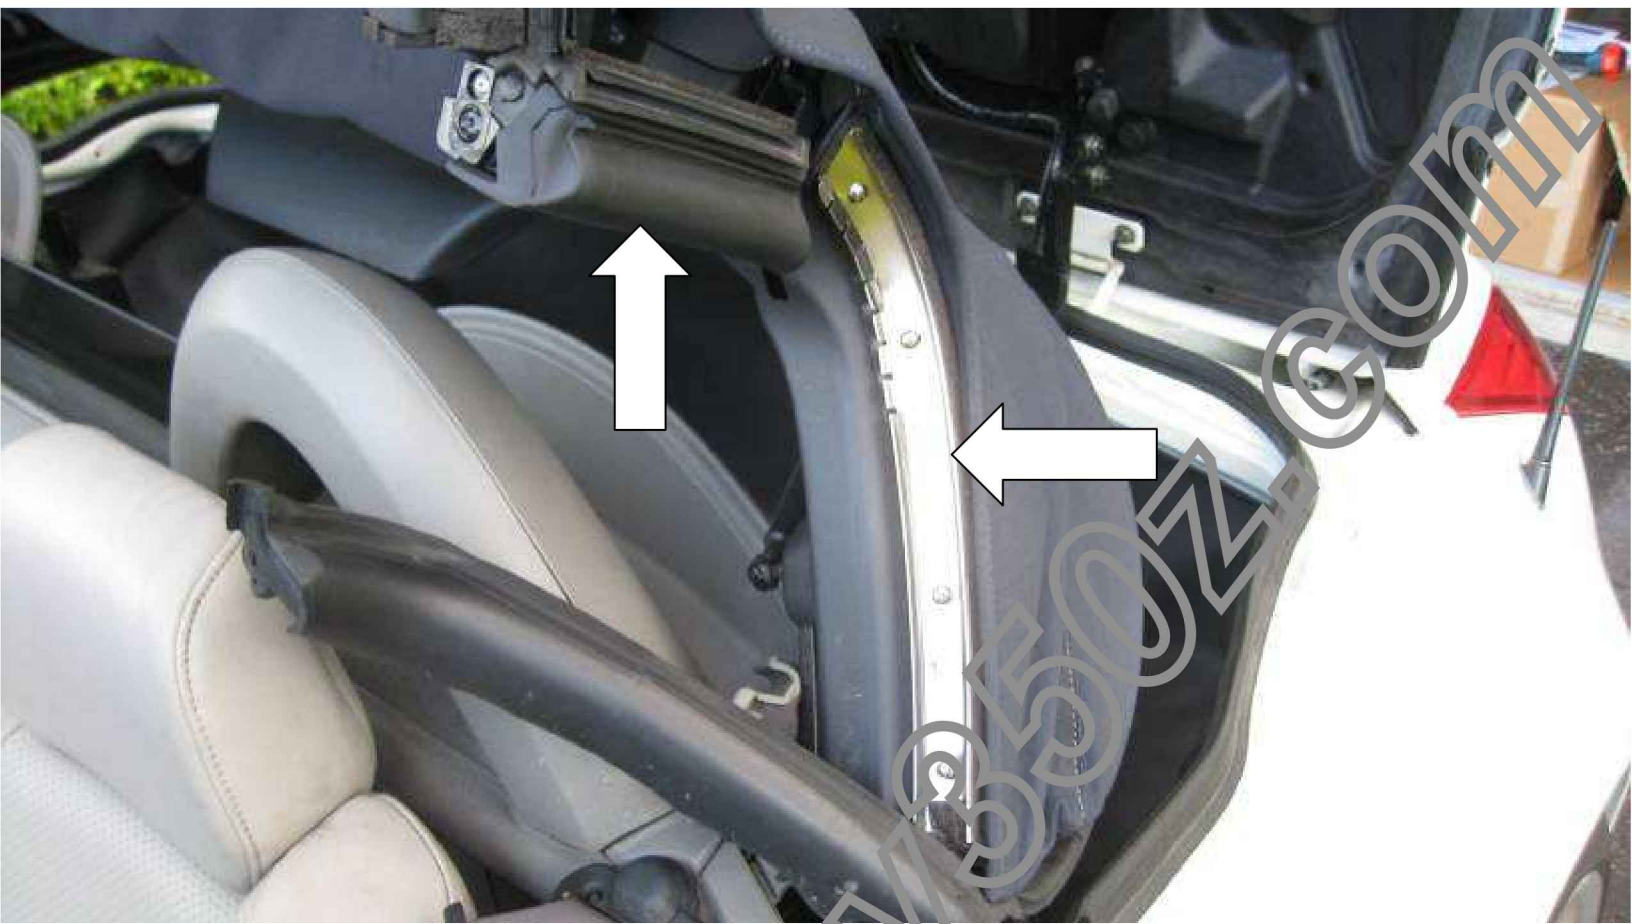

Step 3: After metal bracket is removed it will look like this.

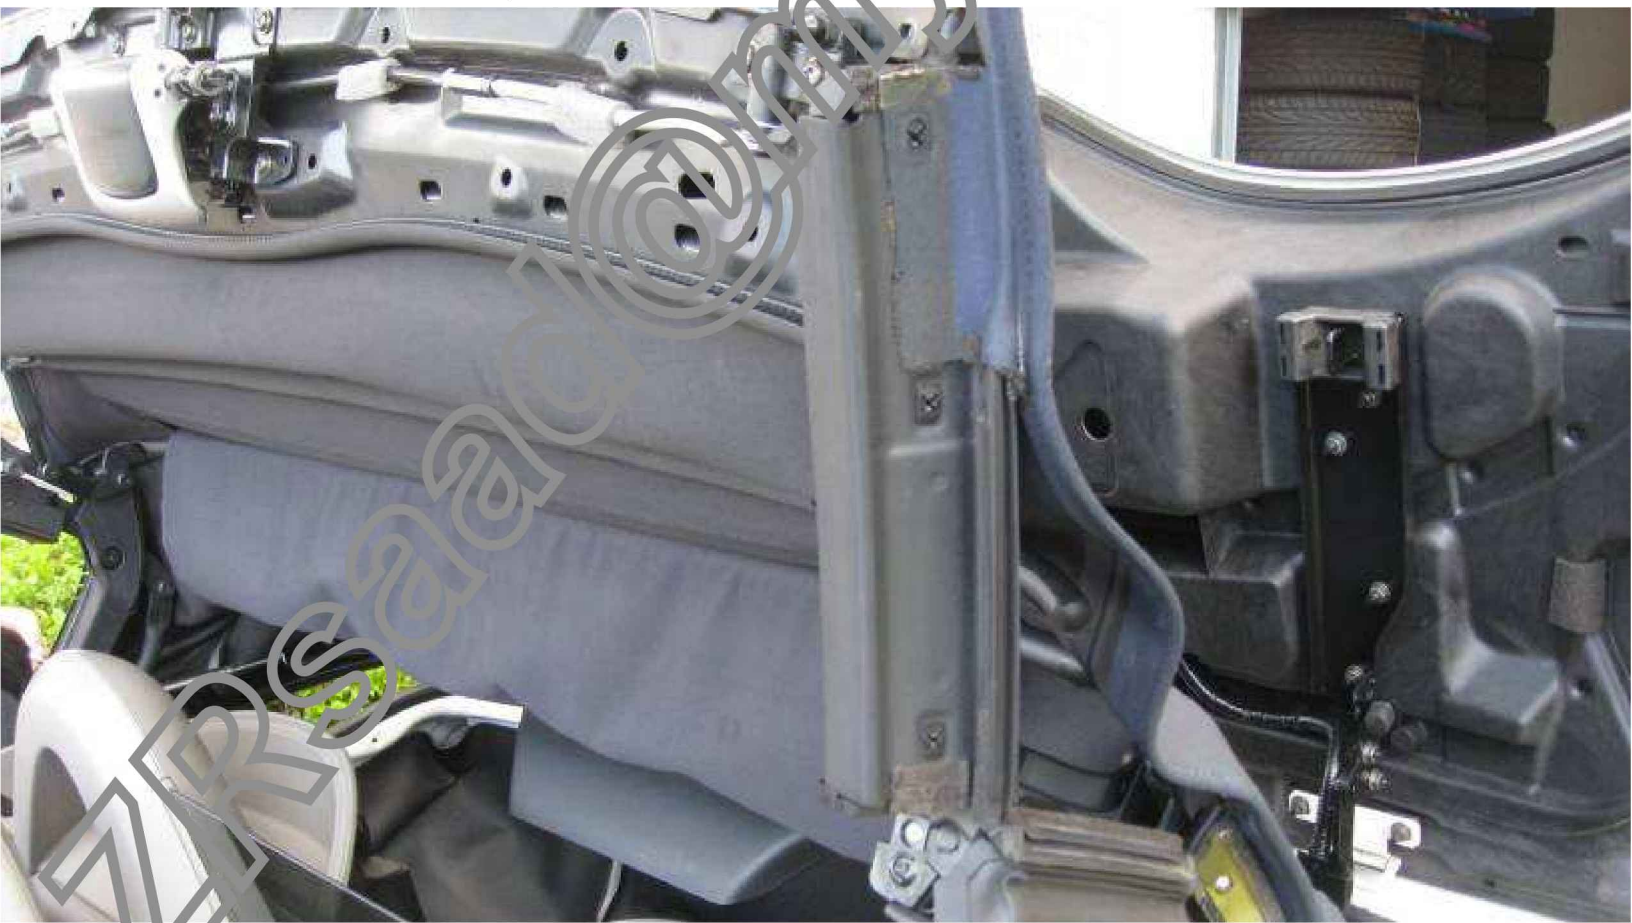

Step 4: Remove all 3 metal brackets (per side) & then you will need to drill out the rivets that held it in place.



Step 5: Now you are ready to pull off the front part of the top. Remember to be careful while taking it off. Some places use double-sided tape to hold it in place.

