

# Specification Sheet

Date Printed: 10/4/2006

Customer: **cp shelf** Job Number: **58976**  
 Customer ID: **0008** P.O. Number: **SC7338**

Quantity: **48** Forging: **94-2** Shelf Part  
 Quantity: **0** Forging: **SC7338**

Bore Diameter: **3.78** Piston Size at Gauge  
 Clearance: **0.0035** Point **0.5 "** up  
 Compression Height: **1.167** from Bottom of Skirt **3.7765**


Top Groove Width: **0.048** Top Groove Diameter: **3.463**  
 2nd Groove Width: **0.048** 2nd Groove Diameter: **3.413**  
 3rd Groove Width: **0.099** 3rd Groove Diameter: **3.499**

Intake Valve Relief: **-0.115** Exhaust Valve Relief: **-.115**

Profile: Pin Diameter: **0.866**  
 Dish Depth: **-0.1** Pin Length: **2.5**  
 Dome Height: **0** Lock Type: **.063 Wire**

Gram Weight: **380** Cam Profile: **CP832XS**

*Top .025"*  
*2nd .007"*

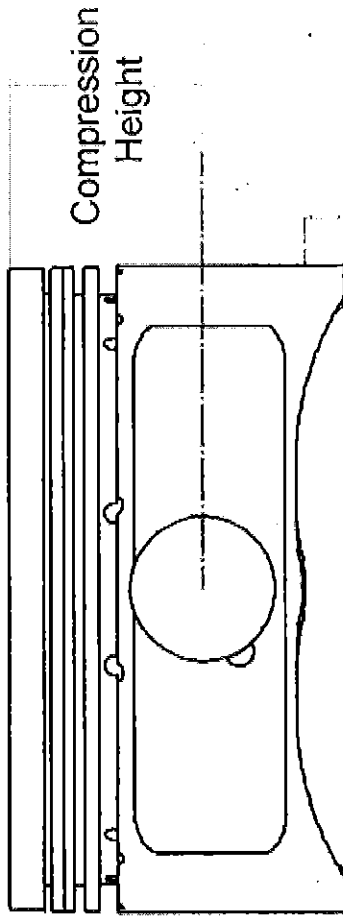

**CP Pistons, LLC**

1902 McGaw Ave. - Irvine, CA 92614 949-567-9000 Fax 949-567-9010 www.cppistons.com