



1. UNLESS OTHERWISE SPECIFIED: PART NUMBERS SHOWN IN THE FIELD OF THE DRAWING ARE FOR REFERENCE ONLY
2. UNLESS OTHERWISE SPECIFIED: RESISTANCE VALUES ARE IN OHMS AND CAPACITANCE VALUES ARE IN MICRO FARADS

VR6swap.com


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

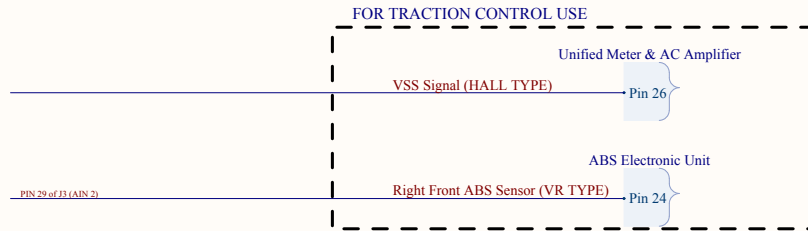

350Z ECU CONNECTOR

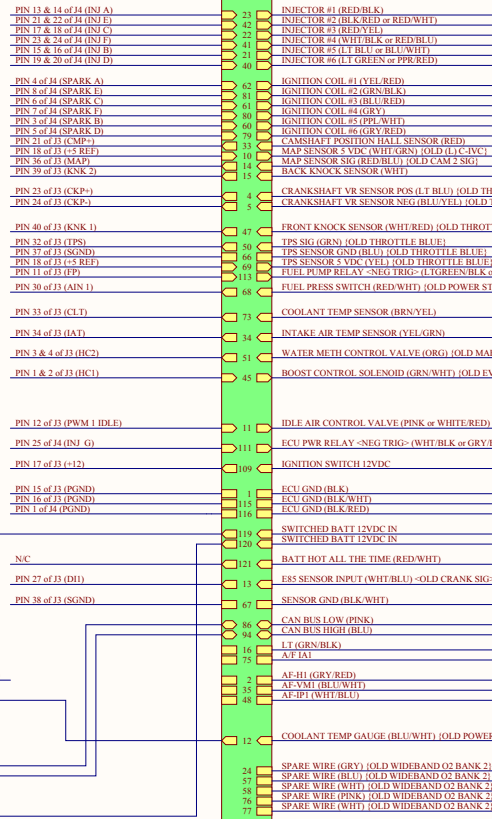


REMOVE ALTERNATOR FUSE FOR CONSTANT POWER WIRE!!!!

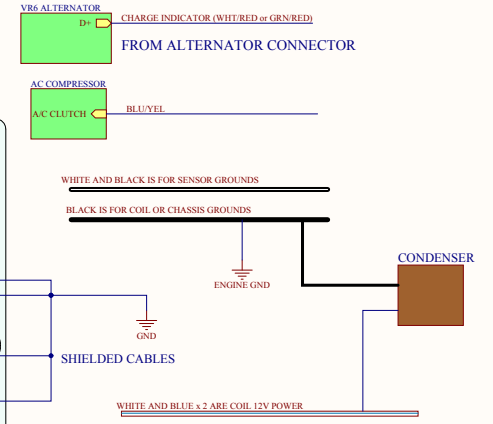

MEGASQUIRT 3 PRO MODULE J3 & J4

(diyautotune.com)

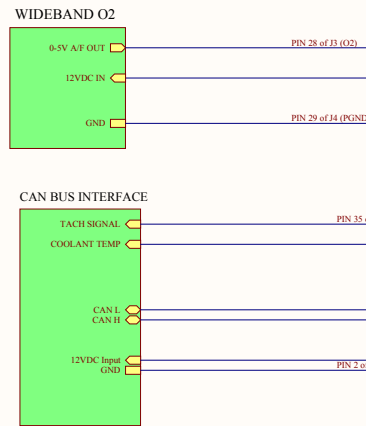

OUT TO ENGINE AND CAR
ASSUME ORIGINAL WIRE FUNCTION UNLESS OTHERWISE SPECIFIED
USE ORIGINAL ASSOCIATED POWER AND GROUNDS UNLESS NOTED

NOTES:

- WIRING FOR 2005 MODEL YEAR 350Z
- MUST SEND NEG TRIG TO ECU RELAY ON PIN 111
- CAN USE HARNESS WIRES TO RUN WIDEBAND O2 SENSOR FROM LCM1
- USE 350Z OIL PRESSURE SENSOR AND WIRING
- NEED TO CONVERT ABS SIG FROM VR TO HALL TYPE SIG

PROPRIETARY
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SEO PERFORMANCE PRODUCTS, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SEO PERFORMANCE PRODUCTS, LLC IS PROHIBITED.

DSGN NO.	NEXT ASSY	USED ON	APPLICATION

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/32
ANGULARS MACH ±5 BEND ±5
TWO PLACE DECIMAL ±.020
THREE PLACE DECIMAL ±.005



CONTRACT NO.	NAME	DATE
DRAWN	CHECKED	ENG APPR.
MFG APPR.	G.A.	



TITLE: Engine Schematic, 350VrZ			
SIZE	CAGE CODE	DWG. NO.	REV
C	6Q6C2	*	X3
2/28/2013			SHEET 1 OF 1

PRELIMINARY